


NOTE
K1 - WHEELLOCK RELAY 3002-1D1-12VDC
WITH NO OUTER SHIELD

Teletype Reader Control 4915

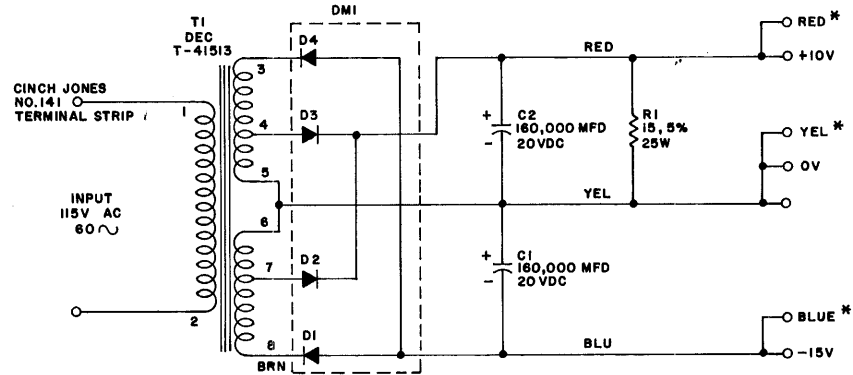

NOTE:
IN ORDER TO KEEP OUTPUT VOLTAGE WITHIN
THE FOLLOWING LIMITS:
+10V: +9.5 TO +11V
-15V: -14.5 TO -16V
THE LOADING SHOULD BE WITHIN THE FOLLOWING LIMITS:

BOTH SIDES LOADED	+10V 0 TO 7.0 AMPS -15V 1.0 TO 8.0 AMPS
ONE SIDE LOADED	+10V 0 TO 7.5 AMPS -15V 1.0 TO 8.5 AMPS

SUM OF THE OUTPUT CURRENTS ARE LIMITED BY
THE EQUATION: $5I_{10} + 6I_{15} \leq 53$

* HEYMAN MFG. CO. TAB TERMINALS

Power Supply 728